


TEFCOLD[®]



2019-2020

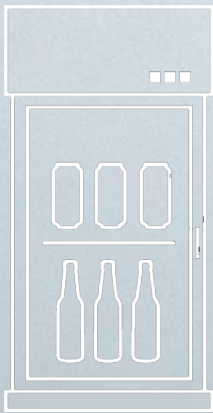

MULTIDECKS

Open Front Multideck Coolers - Sliding Doors Multideck Coolers

TEFCOLD multideck coolers are ideal for self-service in canteens, supermarkets or gas stations. There are two types: open front without doors and a version with sliding doors.

If extra shelf space is required, slide doors are best, giving 30% extra shelf space compared to open front. Slide door models also mean approximately 50% saving in energy consumption compared to open front.

If focus is on convenience for the customer and easy access to the product, open front is the best.

All models have fully-automatic ventilated cooling, to ensure consistent, uniform cooling throughout the unit. Open front models are naturally also fitted with a night blind, to reduce electricity consumption. There is also a low-temperature range for 0 – 4 degrees, ideal for dairy products.



TEFCOLD MD1000X-ZERO

Open front multideck cooler in stainless steel premium design.
For customer convenience and "grab and go" sales.



COOLERS

Open Front Coolers



MD1900

Open Front Cooler

- Premium design
- White finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



Soft release night blind /
curtain



Adjustable shelves with tilting
function



MD1000

Open Front Cooler

- Premium design
- White finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



MD1400

Open Front Cooler

- Premium design
- White finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release

MODEL		MD1000	MD1400	MD1900
Gross / Net Volume	l	657 / 447	913 / 663	1314 / 954
Gross / Net Weight	kg	180 / 162	207 / 185	257 / 228
Climate Class		3	3	3
Temperature Range	°C	2 to 8	2 to 8	2 to 8
Shelves Number & Type		4 white coated tilting	4 white coated tilting	4 white coated tilting
Interior Light		LED	LED	LED
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		White	White	White
Interior Finish		White / Glass	White / Glass	White / Glass
Thermometer		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Noise Level	db(A)	55	55	55
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R452	R452	R452
Refrigerant Charge	g	640	1190	1500
Input Power	W	950	1200	1550
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Energy Consumption	kWh/24h	20,5	25,9	30,8
Internal Dimension (WxDxH)	mm	900 x 444 x 1355	1250 x 444 x 1355	1800 x 444 x 1355
External Dimension (WxDxH)	mm	985 x 737 x 1985	1335 x 737 x 1985	1885 x 737 x 1985
Packed Dimension (WxDxH)	mm	1050 x 760 x 2120	1400 x 760 x 2120	1920 x 760 x 2120
40ft Container Load	pcs	33	25	18



COOLERS

Open Front Coolers



MD1900X

Open Front Cooler

- Premium design
- Stainless steel finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



Soft release night blind /
curtain



Adjustable shelves with tilting
function



MD1000X

Open Front Cooler

- Premium design
- Stainless steel finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



MD700X-ZERO

Open Front Cooler

- Ideal for dairy products
- Temperature range 0-4°C
- Premium design
- Stainless steel finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release

MODEL		MD1000X	MD1000X-ZERO	MD1400X	MD1900X	MD700X-ZERO
Gross / Net Volume	l	657 / 447	657 / 447	913 / 663	1314 / 954	438 / 318
Gross / Net Weight	kg	180 / 162	180 / 162	207 / 185	257 / 228	142 / 126
Climate Class		3	3	3	3	3
Temperature Range	°C	2 to 8	0 to 4	2 to 8	2 to 8	0 to 4
Shelves Number & Type		4 SS304 tilting	4 SS304 tilting	4 SS304 tilting	4 SS304 tilting	4 SS304 tilting
Interior Light		LED	LED	LED	LED	LED
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Interior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Thermometer		Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Noise Level	db(A)	55	55	55	55	55
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R452	R452	R452	R452	R452
Refrigerant Charge	g	640	1190	1190	1500	590
Input Power	W	950	1300	1200	1550	1240
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Energy Consumption	kWh/24h	20,5	23,9	25,9	30,8	20
Internal Dimension (WxDxH)	mm	900 x 444 x 1355	900 x 444 x 1355	1250 x 444 x 1355	1800 x 444 x 1355	600 x 444 x 1355
External Dimension (WxDxH)	mm	985 x 737 x 1985	985 x 737 x 1985	1335 x 737 x 1985	1885 x 737 x 1985	685 x 727 x 1985
Packed Dimension (WxDxH)	mm	1050 x 760 x 2120	1050 x 760 x 2120	1400 x 760 x 2120	1920 x 760 x 2120	750 x 760 x 2120
40ft Container Load	pcs	33	33	25	18	48



COOLERS

Open Front Coolers



MD1100-SLIM

Open Front Cooler

- Slim model - only 580 mm depth
- White finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



Soft release night blind /
curtain



Adjustable shelves with tilting
function



MD600-SLIM

Open Front Cooler

- Slim model - only 580 mm depth
- White finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



MD900-SLIM

Open Front Cooler

- Slim model - only 580 mm depth
- White finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release

MODEL		MD1100-SLIM	MD600-SLIM	MD900-SLIM
Gross / Net Volume	l	615 / 418	335 / 226	503 / 342
Gross / Net Weight	kg	179 / 158	133 / 124	165 / 152
Climate Class		3	3	3
Temperature Range	°C	2 to 8	2 to 8	2 to 8
Shelves Number & Type		4 white coated tilting	4 white coated tilting	4 white coated tilting
Interior Light		LED	LED	LED
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		White	White	White
Interior Finish		White / Glass	White / Glass	White / Glass
Thermometer		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Noise Level	db(A)	55	55	55
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R452	R452	R452
Refrigerant Charge	g	1190	590	640
Input Power	W	1040	870	940
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Energy Consumption	kWh/24h	19,9	15,7	19,8
Internal Dimension (WxDxH)	mm	1100 x 517 x 1347	600 x 517 x 1347	900 x 517 x 1347
External Dimension (WxDxH)	mm	1170 x 580 x 2005	670 x 580 x 2005	970 x 580 x 2005
Packed Dimension (WxDxH)	mm	1240 x 665 x 2140	740 x 665 x 2140	1040 x 665 x 2140
40ft Container Load	pcs	28	54	36



COOLERS

Open Front Coolers



MD1100X-SLIM

Open Front Cooler

- Slim model - only 580 mm depth
- Stainless steel finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



Soft release night blind /
curtain



Adjustable shelves with tilting
function



MD600X-SLIM

Open Front Cooler

- Slim model - only 580 mm depth
- Stainless steel finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release



MD900X-SLIM

Open Front Cooler

- Slim model - only 580 mm depth
- Stainless steel finish
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Temperature range 2-8°C
- LED interior light with switch
- Digital controller and temperature display
- Night blind / Curtain with soft release

MODEL		MD1100X-SLIM	MD600X-SLIM	MD900X-SLIM
Gross / Net Volume	l	615 / 418	335 / 226	503 / 342
Gross / Net Weight	kg	179 / 158	133 / 124	165 / 152
Climate Class		3	3	3
Temperature Range	°C	2 to 8	2 to 8	2 to 8
Shelves Number & Type		4 SS304 tilting	4 SS304 tilting	4 SS304 tilting
Interior Light		LED	LED	LED
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Stainless steel	Stainless steel	Stainless steel
Interior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Thermometer		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Noise Level	db(A)	55	55	55
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R452	R452	R452
Refrigerant Charge	g	1190	590	640
Input Power	W	1040	870	940
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Energy Consumption	kWh/24h	19,9	15,7	19,8
Internal Dimension (WxDxH)	mm	1100 x 517 x 1347	600 x 517 x 1347	900 x 517 x 1347
External Dimension (WxDxH)	mm	1170 x 580 x 2005	670 x 580 x 2005	970 x 580 x 2005
Packed Dimension (WxDxH)	mm	1240 x 665 x 2140	740 x 665 x 2140	1040 x 665 x 2140
40ft Container Load	pcs	28	54	36



COOLERS



ECO-FRIENDLY
REFRIGERANT R290

Multidecks



DID YOU KNOW?

Multidecks with glass doors help save app. 50% on energy consumption compared to open front multidecks. And they have 30% more shelf space.

MDS1900-P

Multideck

- Premium design
- Generous display space
- Glass doors help save energy
- Self-closing sliding glass doors
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Ventilated cooling
- Digital controller and temperature display



Lock



Adjustable shelves with tilting function



MDS1000-P

Multideck

- Premium design
- Generous display space
- Glass doors help save energy
- Self-closing sliding glass doors
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Ventilated cooling
- Digital controller and temperature display



MDS1400-P

Multideck

- Premium design
- Generous display space
- Glass doors help save energy
- Self-closing sliding glass doors
- Adjustable shelves with tilting function
- Shelf stopper for tilting is accessory
- Ventilated cooling
- Digital controller and temperature display

MODEL		MDS1000-P	MDS1400-P	MDS1900-P
Gross / Net Volume	l	685 / 601	940 / 825	1340 / 1180
Gross / Net Weight	kg	226 / 216	275 / 247	346 / 327
Climate Class		3	3	3
Temperature Range	°C	0 to 8	0 to 8	0 to 8
Door Number & Type		2 self-closing sliding glass doors	2 self-closing sliding glass doors	2 self-closing sliding glass doors
Shelves Number & Type		4 white coated tilting	4 white coated tilting	4 white coated tilting
Interior Light		LED	LED	LED
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Grey, RAL9006	Grey, RAL9006	Grey, RAL9006
Interior Finish		White / Glass	White / Glass	White / Glass
Lock		Yes	Yes	Yes
Thermometer		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Noise Level	db(A)	55	55	55
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	125	140	220
Input Power	W	750	930	1200
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Energy Consumption	kWh/24h	6,9	10,5	14,5
Internal Dimension (WxDxH)	mm	945 x 480 x 1380	1295 x 480 x 1380	1845 x 480 x 1380
External Dimension (WxDxH)	mm	985 x 737 x 1987	1335 x 737 x 1987	1885 x 737 x 1987
Packed Dimension (WxDxH)	mm	1090 x 760 x 2150	1440 x 760 x 2150	1990 x 760 x 2150
40ft Container Load	pcs	33	25	18