

AWK

RANGE POTATO WASHING AND PEELING MACHINES



From 100 kg
up to 500 kg

Gastronomy


Hotels

Catering services


Canteens

Hospitals

Food processing
industry



Perforated peeling discs
Surface slightly uneven,
minimal browning, longer
peeling time



Peeling disc with fitted blades
Smooth surface, peeled-by-
hand quality, more waste,
hardly any browning, shorter
peeling time



Corundum peeling disc, ideal
for peeling tuber vegetables
Rough surface, minimal peeling
waste, quick browning, short
peeling time

- Solid, stable, rustproof design
- Safety switch-off of the cover (motor stop according to EU standard)
- Water saving regulation with high economic and ecological benefits
(Water supply only with engine running)
- Choice of peeling processes with automatic peeling times
- Rubber-lined interior with cushioning effect ensures gentle processing
- Gentle emptying

AlexanderSolia
FOOD
PROCESSING

Alexanderwerk **SOLIA®**

AW K RANGE TYPE OVERVIEW



AW K 35.3
From 1000 servings.
Commercial kitchens
Food industry




AW K 8.3
For 100 to 600 servings.
Gastronomy
Hotels
Catering services
Canteens




AW K 15.3
For 500 to 1000 servings.
Gastronomy
Hotels
Canteens
Catering services
Hospitals

TECHNICAL DATA


	AW K 8.3	AW K 15.3	AW K 35.3
Power supply	400 V, 50 Hz 2.7 m cable with CEE plug	400 V, 50 Hz 2.7 m cable with CEE plug	400 V, 50 Hz 3.5 m cable with CEE plug
Water connection	Tube R 1/2"	Tube R 1/2"	Tube R 1/2"
Output (kW)	0.55	0.55	2.2
Fuse protection (A)	16	16	16
Ingress protection	IP 54 (splash-proofed)	IP 54 (splash-proofed)	IP 54 (splash-proofed)
Infinitely variable speed control (rpm)	160/320	160/320	160/320
Water consumption papoxx. l/min	6-8	8-10	15
Dimensions (L x W x H)	540 x 608 x 870 mm	592 x 664 x 934 mm	847 x 891 x 1214 mm
Weight (kg)	42	50	169



AW K 8.3

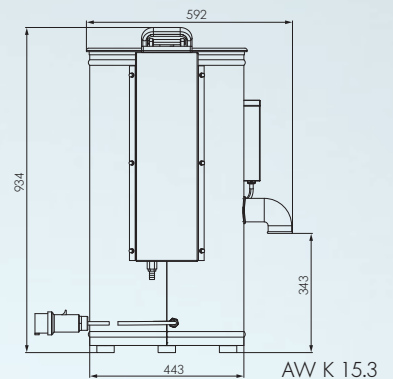

AW K 15.3

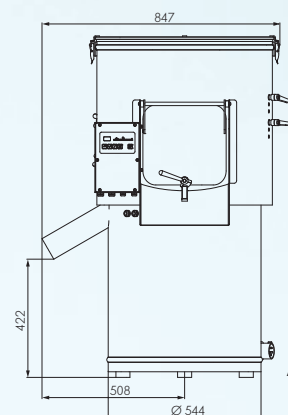

AW K 35.3

PROCESSING CAPACITY

	AW K 8.3	AW K 15.3	AW K 35.3
Filling capacity (kg)	8	15	30-40
Peeling capacity (kg/h)	200	400	500-1200

*Capacity per peeling process: calculated at a total operating time of more than 8 hours a day.

The figures shown here are for illustration only and may deviate from the actual design version. Technical alterations are reserved.
For additional accessories please refer to our price list.